


# CAMP DIGITAL

## HD ONE

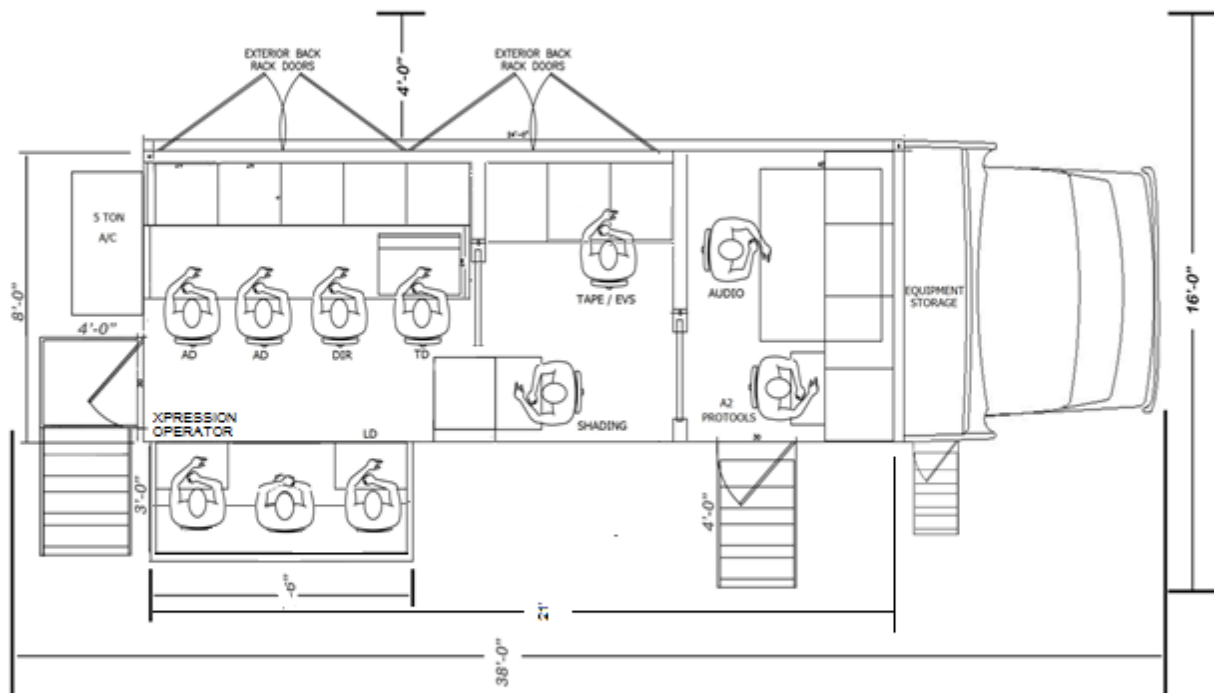

### **HD ONE - WEST COAST OPERATIONS SPECIFICATIONS**

*Curb Length: 38' (Bumper to Bumper + Stairs)*

*Width: 16' (w/stairs, Expando & Rack Doors)*

*Height: 12'*

*Weight: 32,000lbs*

*Power Req.: 208-220 VAC, Single Phase, 100 Amp*



## HD ONE EQUIPMENT LIST

### VIDEO PRODUCTION

- ROSS Carbonite Extreme Integrated 2ME Switcher / Router
- Dashboard

### CAMERAS

- 6 Sony HDC950 Multi-Format Cameras
- 4 Studio Configuration Kits w/ sleds

### VIDEO ROUTER

- Carbonite Extreme 88 IN / 128 OUT router
- 3 External Router Panels

### VIDEO RECORD

- 8 KiPro Rack Hard Drive Recorders
- Black Magic USB Duplicators

### VIDEO GRAPHICS

- ROSS Xpression 2 Channel 3D Graphics System

### VIDEO REPLAY

- 6 Channel EVS XT2 With X-File (available upon request)

### INTERCOM

- RTS/Telex Cronus System
- 12 KP-32, KP-16 and KP-12 Stations
- 8 Channels Wet Intercom, SAP 2616
- 8 IFB Channels
- IFB and PL via fiber to stagebox
- 12 BP325 Beltpacks
- 3 IFB Beltpacks w/ earpieces
- 2 Telephone Interfaces

## AUDIO

- Soundcraft Vi4 Digital Audio Mixing Console w/ Remote Stagebox (64 Mic Inputs)
- JBL Audio Monitoring
- Cedar Noise Suppression
- Mac Mini / Pro Tools Multi-track Recording System
- PIX 270i redundant multi-track recorder

## TERMINAL EQUIPMENT

- Evertz Master Clock and Sync Generator
- Leader/Tek test measure scopes
- Merlin 4 Line phone system with ring down
- Evertz VIP 12, VIP 8, and 2 16x Integrated Multi-viewers
- 2 Teranex Standards Converters
- 1 Folsom Image Pro

## MONITORS

- 5 15" HD Monitors
- 2 9" Analog Monitors
- 1 14" CRT Hi Resolution Monitor
- 3 24" HD Monitors
- 2 46" HD Monitors

## CABLING

- 5000' SMPTE Hybrid Camera Cable
- Various BNC Video Cable
- Various XLR Audio Cable
- Various Single Mode TAC Fiber